


Bias probe & socket line-up


SC-50V

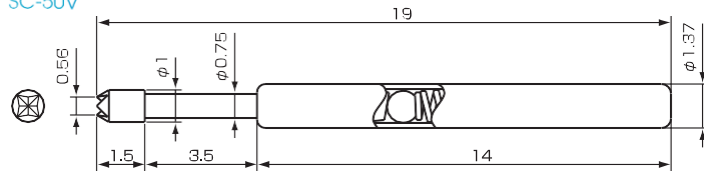

Suitable pitch: 2.54mm

Spring force	St used	Full St
Initial	2.3mm	3.5mm
40g	100g	130g


SCR-1UG

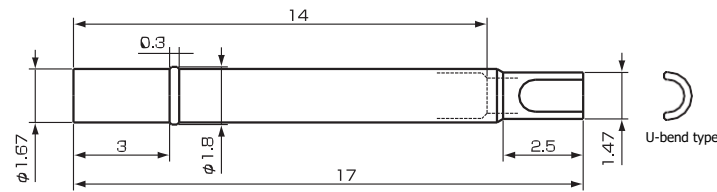

Material and Plating

Material	Plating
SC-50V Plunger	BeCu / Ni+Au
Barrel	PB / Ni+Au
Ball	SK / Ni+Au
Spring	SWP / Ni+Au
SCR-1UG Receptacle	BS / Ni+Au

SC-05

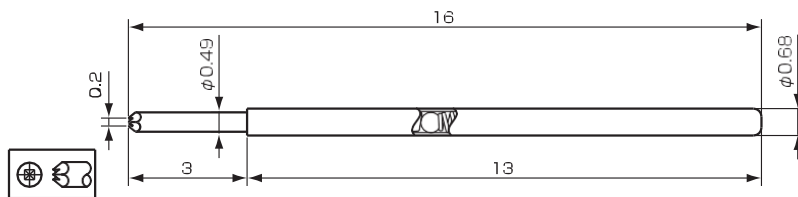

Suitable pitch: 1.27mm

Material and Plating


Plunger	SK / Ni+Au
Barrel	PB / Ni+Au
Ball	SK / Ni+Au
Spring	SWP / Ni+Au

Suitable sockets

- SOR-F (SO series)
- SOR-ST (SO series)
- SOR-FS (SO series)
- SOR-FK (SO series)

Spring force	St used	Full St
Initial	2mm	3mm
25g	70g	100g

SC-050

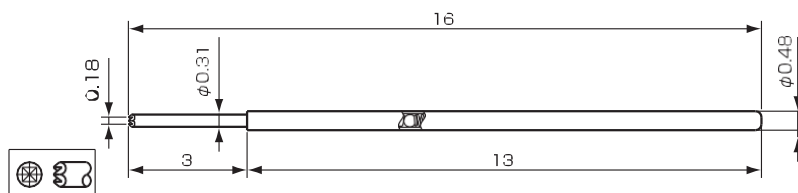

Suitable pitch: 0.8mm

Material and Plating

Plunger	SK / Ni+Au
Barrel	PB / Ni+Au
Ball	SK / Ni+Au
Spring	SWP / Ni+Au

Suitable sockets

- SFR-F (SF series)
- SFR-ST (SF series)

Spring force	St used	Full St
Initial	0.9mm	1.4mm
10g	30g	40g