


Probe specifications

Suitable pitch: 0.75mm
Current rating: 2A




Material and Plating

Plunger	Check below
Barrel	PB / Ni+Au
Spring	SWP / Ni+Au
Receptacle	PB / Ni+Au

Probe line-up

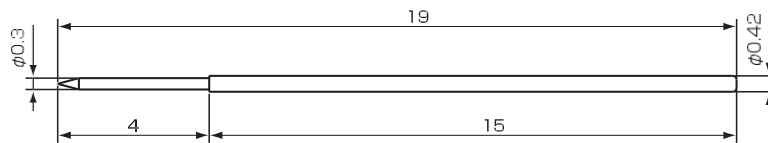


Spring force	St used	Full St
Initial	1.3mm	2mm
	25g	65g

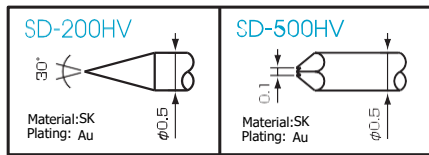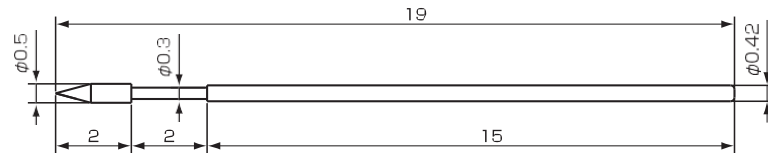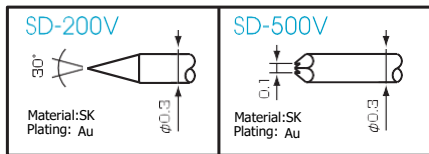

Socket line-up


SDR-F

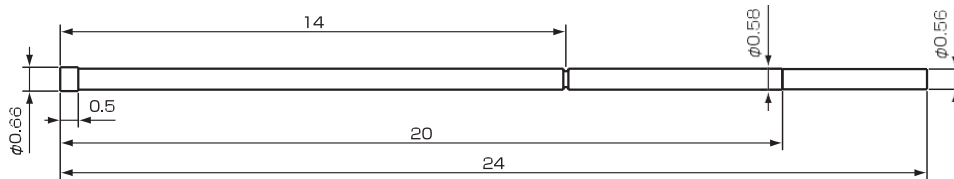

※ Wire crimping type

SDR-FHR100/300

[Lead wire 100mm / 300mm]



Reference hole diameter: $\phi 0.6$