


Probe specifications

Suitable pitch: 2.54mm
Current rating: 4A

Material and Plating

Plunger Check below
Barrel PB / Ni+Au
Spring SWP / Ni+Au
Receptacle BS / Ni


Probe line-up

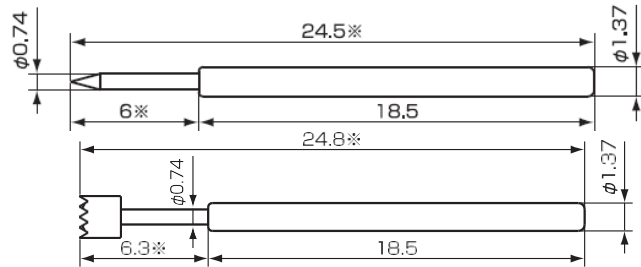

※ May differ for some tip shapes (check below).

	Spring force		
	Initial	St used	Full St
EA	60g	75g	95g
EB	40g	100g	130g
EC (Std.)	20g	130g	180g
ED	40g	210g	290g

	SE-2NV only		
	Initial	St used	Full St
EE	30g	5.1mm	7.6mm
		110g	150g

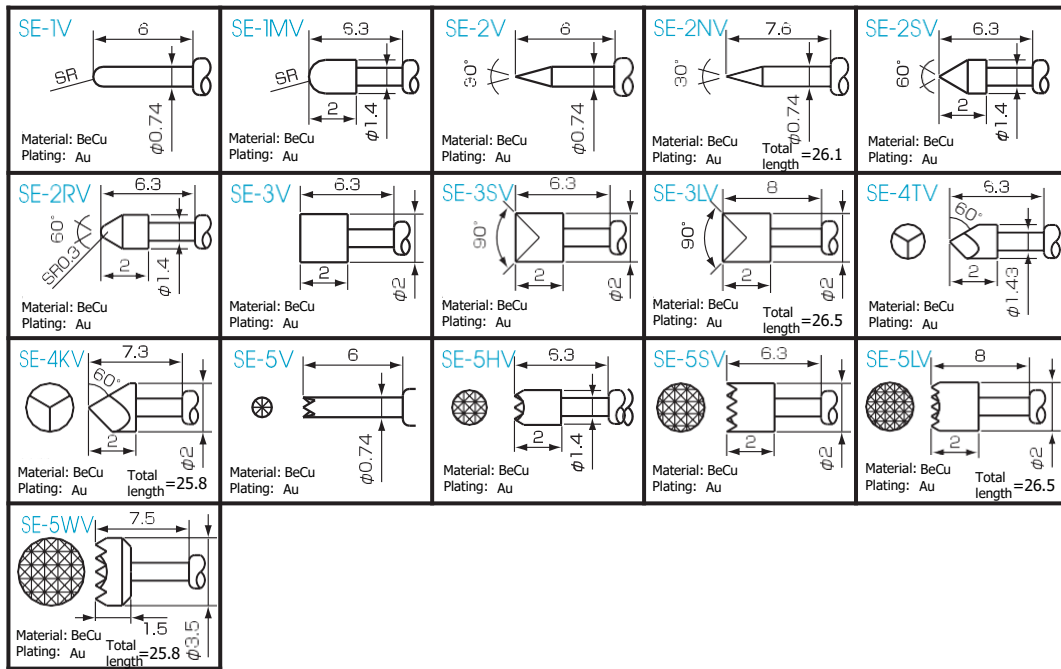

Socket line-up

