


Probe specifications

Suitable pitch: 2.54mm
Current rating: 4A

Material and Plating

Plunger Check below
Barrel PB / Ni+Au
Spring SWP / Ni+Au
Receptacle BS / Ni


Probe line-up

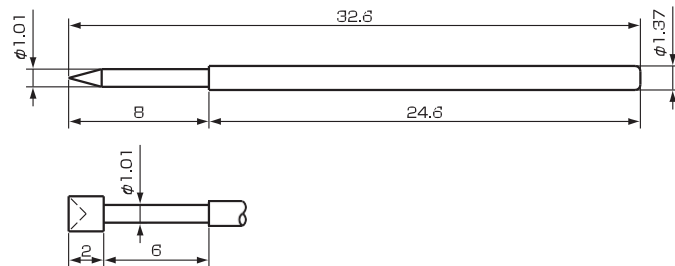

	Spring force		
	Initial	4 mm	Full St
VA	20g	120g	180g
VB (Std.)	25g	150g	200g
VC	45g	200g	280g
VD	30g	110g	150g

SV-2V Material: BeCu Plating: Au	SV-2UV Material: BeCu Plating: Au	SV-3SV Material: BeCu Plating: Au	SV-3DV Material: BeCu Plating: Au
SV-4SV Material: BeCu Plating: Au	SV-4DV Material: BeCu Plating: Au	SV-5V Material: BeCu Plating: Au	SV-5SV Material: BeCu Plating: Au
SV-5DV Material: BeCu Plating: Au	SV-5CV Material: BeCu Plating: Au	SV-5WV Material: BeCu Plating: Au	

Socket line-up

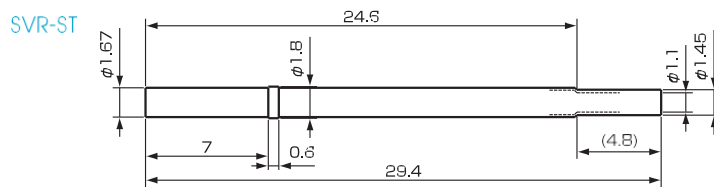

Reference hole diameter: $\phi 1.75$

SVR-UG [For solder] U-bend type	SVR-LP [For wrapping] Clip type	SVR-ST HR100/300 [Lead wire 100mm / 300mm] Wire crimping type
---	---	--